

TWIN WATER SOFTENER SYSTEM



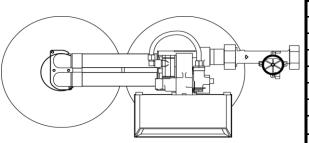

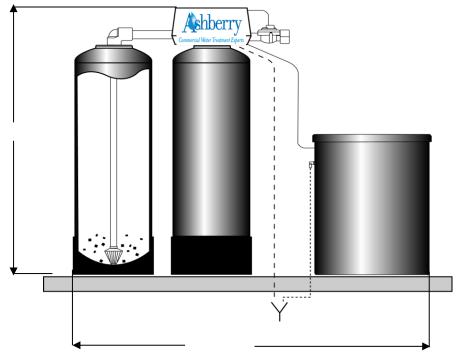

Water Softener Specification

Trater Con	onor opeemeation
Model #	ASH-120-1.5-ALT
Capacity:	120,000 Grains ea.
Flow Rate:	37 GPM
Peak Flow:	48 GPM
BW Rate:	7.0 GPM
Tank Size:	16" X 65" Fiberglass
Brine Tank:	24" DIA. X 40" Poly
Media Vol.:	4.0 FT ³ ea.
Valve:	9500
Pipe Size:	
Inlet:	1.5" NPT
Outlet:	1.5" NPT
Drain:	1" NPT
Meter:	Single meter
Weight:	
Shipping:	LBS.
Operating:	LBS.
•	

Note:

Supply sufficient pipe support to insure that no pipe weight is supported by the softener control.

All Dashed pipe, valves and fittings provided by others.

Make all plumbing connections in accordance with all state and local plumbing codes.

Install sample valve on softener outlet for ease of sampling water hardness.